


**Auto Activating Technology. Don't Drop the Ball!**



## SlidePro Friction Breaking Technology

SlidePRO Friction Breaking System Strengths

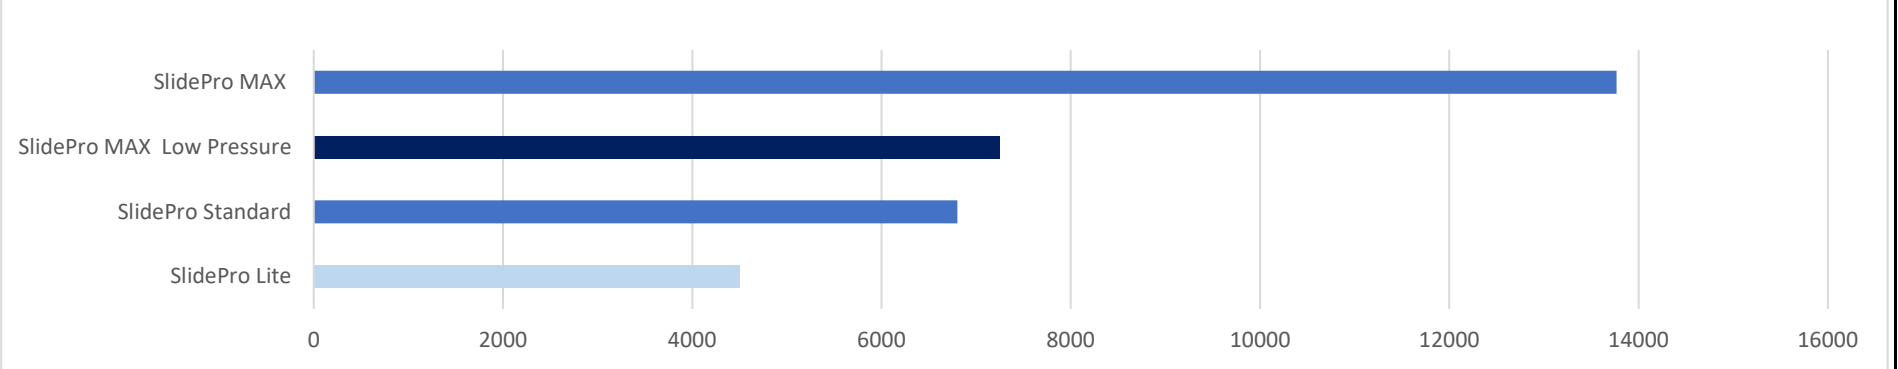

Friction Breaking Setup	Length	Pressure Drop	Placement from Bit	Friction Breaking Strength	Auto Activation
SlidePro Lite	6.32 m	3,800 kPa	300 - 500 m	4,500daN (9,000 lbs)	No
SlidePro Standard	7.92 m	3,800 kPa	700 - 900 m	6,800 daN (14,960 lbs)	Yes
SlidePro MAX Low Pressure	10.52 m	2,000 kPa	700 - 1000 m	7,246 daN (15,941 lbs)	Yes
SlidePro MAX	10.52 m	3,800 kPa	1400 - 1900 m	13,768 daN (30,289 lbs)	Yes

**Notes**

Connections DS40  
 Auto Activation feature is available upon request. No ball or dart is required.  
 Deactivated SlidePro operates as a Lite tool in vertical until fully activated at KOP

**Contacts:**

Jason Bjornson                      403 512 0572                      Mission Drilling

